

# WS2-HM


## HAZARD MONITORING WEB SERVER CONTROLLER

### FEATURES & BENEFITS

- Simple set-up, user-friendly navigation and machine graphics
- Compatible with any PLC or PC- No MS Windows or annual fees!
- Easy implementation and configuration- no HMI/PLC programming
- Browser accessible, no software required
- Remote access to data and alarms
- Intuitive screens and user interface for at-a-glance alarm location and condition identification
- Fully compatible with any existing CMC Intrinsically Safe network
- DIN rail mount for easy installation



ACCOUNTABILITY AND PREDICTIVE MAINTENANCE CAPABILITY

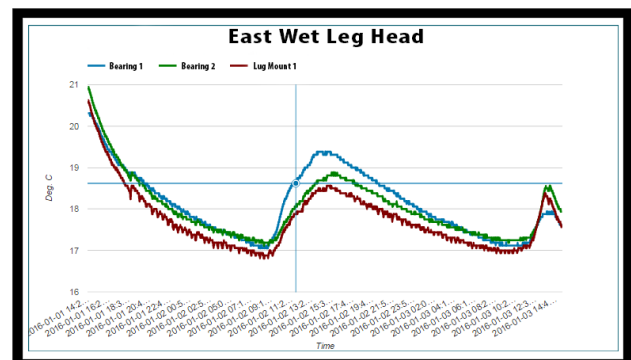


SENSOR TRENDING AND ALARM HISTORY AT THE PUSH OF A BUTTON

# WS2-HM

## HAZARD MONITORING WEB SERVER CONTROLLER

### INTUITIVE MACHINE SCREENS

Intuitive machine screens and user interface enable straightforward system navigation and configuration for at-a-glance status and alarm reporting

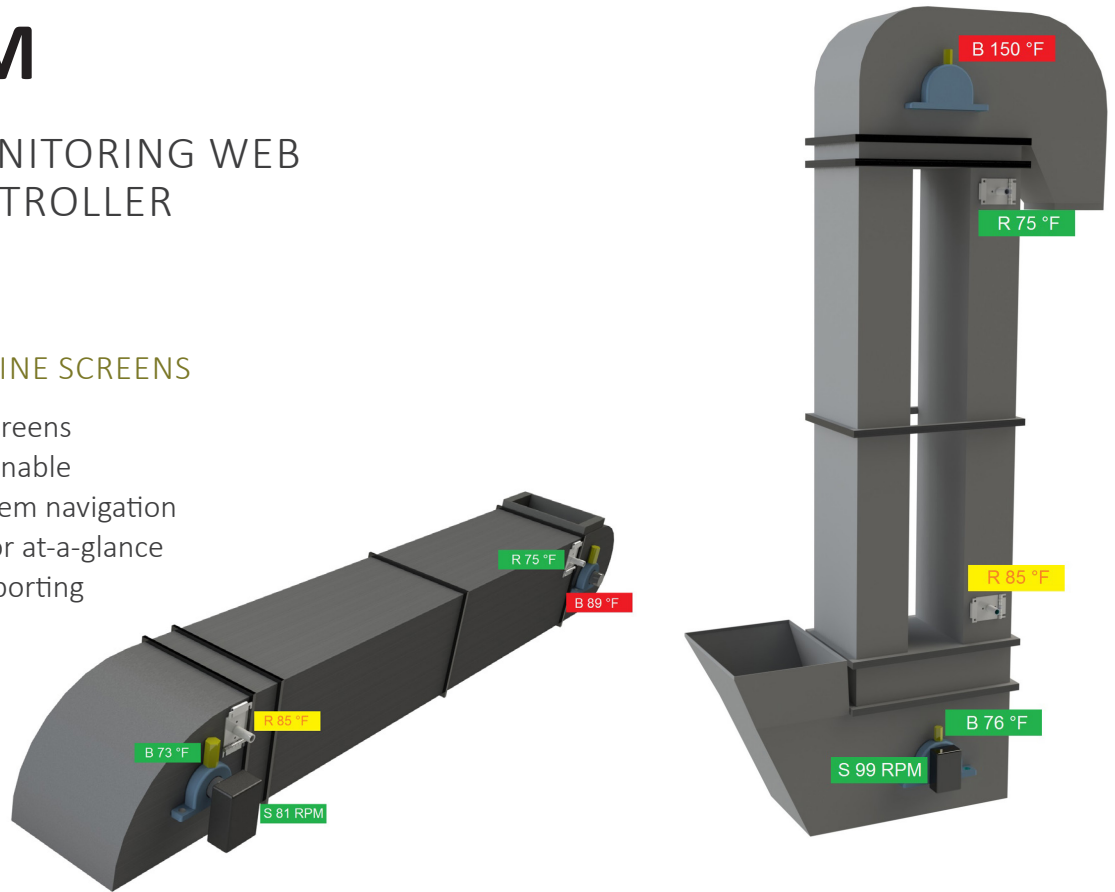

Specifications	Description	Characteristic
Power Supply	Voltage	24 VDC
	Current	1.5 A (36 VA)
Ethernet Communication Protocols	EtherNet/IP and Modbus TCP/IP	RJ-45 port
Bus Converter Communication	Standard	RS485 differential
	Distance	1640ft (500m)
	Termination	120 Ω balanced line
Environment	Temperature	32°F to 122°F (0°C to 50°C)
	Relative Humidity	0 to 70% non condensing
Dimensions	Depth	3" (76.2mm)
	Width	7.05" (179mm)
	Height	3.94" (100mm)

WS2-HM DS A03

888.421.4425 | sales@cmciel.com  
 AGGROWTH.COM | CMCIEL.COM

