

HCX

BELT CONVEYORS



HCX³ Field Loader

1500

10" Tube | 15" Belt | Capacity up to 10,000 BPH

The all new HCX³ has been designed to handle anything a farm throws at it. This latest model has been scrutinized from hopper to spout with our operators in mind. Find the unit right for your operation.



FEATURES

- Redesigned S-Drive with longer take-up which can be adjusted with normal tools and no longer runs the risk of over-tightening
- Grain flows straight down from the spout with the newly redesigned No-Nonsense Hood
- Precision-made urethane hopper seals secure the belt to the hopper bed reducing the chance of spillage/leakage
- Under hopper skid plate stops debris from touching the bottom of the belt, keeping it off the belt and protecting the belt from damage
- Two optional gas engines to choose from: 33 EFI or 32 HP Carb
- Available with the motor above or below the tube

FMD

Fully Loaded

Available in 49' length

FEATURES

- All grain commodity system suitable for all seed types, including oil seeds
- Easy to use Turbo Clean Wash System removes debris and residue from tough to wash commodities, like fertilizer or oil seeds
- Beat build-up and keep your belt cleaner for longer with the help of two new belt scrapers and a belt brush
- Parallel hopper cloth stays 32" wide for the full working length

See FLTD for hopper dimensions

TWO YEAR LIMITED WARRANTY

Even while using oil seeds, as long as proper clean-out procedures are strictly followed.

**On FMD Model Only


FLTD

Field Loader Top Drive

Available in 39', 44', and 49' lengths

FEATURES

- Drive roller and pinch roller track together and are easier to access with a newly added removable top plate
- Parallel hopper cloth stays 32" wide for the full working length

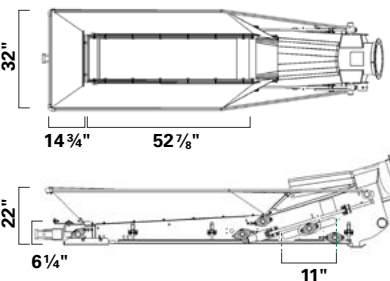


CUB

Compact Unload Belt

Available in 39', 44', and 49' lengths

FEATURES

- Designed specifically for ultra-low bin unloads, the Compact Unload Belt (CUB) hopper fits underneath even the lowest bin unloads
- Drive roller and pinch roller track together and are easier to access with a newly added removable top plate

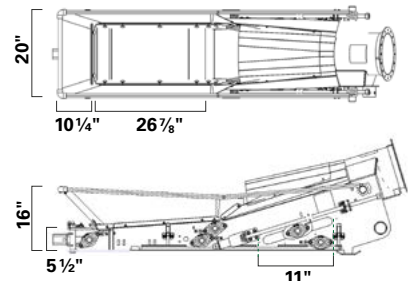


OPTIONAL IBEX WHEEL MOVE

THE MOUNTAIN GOAT

- Redesigned with a drop-and-go wheel move for quick set up
- Redesigned to put the majority of the conveyor's weight on the single tire for greater traction
- Built-in braking system
- Ergonomic command center controls the electric throttle, lights, start/stop, hydraulics, and electric clutch - and is set further back for increased reach

HCX BELT CONVEYOR SPECIFICATIONS

MODEL	BELT LENGTH	WEIGHT LBS	UP-OPERATION		DOWN-OPERATION		WIDTH	HP PTO	HP ELEC	HP HYD. (CU.IN.)
			A	B	A	B				
1535TD	68' 8"	1506	16.3	11.3	10.8	12.3	7.5	N/A	5 HP	5.9 (H SERIES)
1539 CUB	81' 3"	1500	19.2	15.8	8.9	16.7	7.5	N/A	10	N/A
1544 CUB	91' 3"	1800	19.9	18.7	10.5	18.9	7.5	N/A	10/12.5	N/A
1549 CUB	101' 3"	2000	19.3	21.7	10.6	20.9	7.5	N/A	12.5	N/A
1539 FLTD	86' 3"	1600	20.2	19.2	8.7	18.6	7.5	N/A	10	N/A
1544 FLTD	96' 3"	1900	20.8	20.2	10.1	21	7.5	N/A	10/12.5	N/A
1549 FLTD	106' 3"	2100	20.8	23.2	10.9	23.2	7.5	N/A	12.5	N/A
HCX ² 1549	110' 8"	3800	20.9	21.4	9.7	22.9	7.5	N/A	N/A	N/A
1590	185'	3850	44.2	39.5	14.9	46.7	11.3	50 HP	25 HP	6.2
1800 PITSTOP	46' 8"	2970	N/A	N/A	2.8	4.5	7.9	N/A	15 HP	N/A
2400 PITSTOP	45' 3"	1300	N/A	N/A	N/A	N/A	N/A	N/A	15 HP	8.0 (2000 Series)
1515	30' 8"	642	N/A	N/A	2.8	6.2	3.8	N/A	5 HP	5.9



A up is conveyor discharge height (from bottom of discharge hood) at 30 degrees
A down is overall conveyor height (from top of discharge hood)

HCX 1535TD

35' Length | up to 6,000 BPH

The HCX 1535 top drive belt conveyor features an A-frame undercarriage, a 10" tube and 15" inch 2-ply chevron belt with a nylon slider back. The HCX 1535 top drive is available in electric or hydraulic drives.

HCX 1590SA


10" Tube | 15" Wide Belt | 90" Length | up to 6,000 BPH

The HCX 1590 swing away conveyor was designed to reach your bin without losing capacity or sacrificing the commodity. For added convenience, the HCX 1590 is equipped with a hydraulic swing away to move the hopper into position and a hydraulic winch to raise and lower the hopper with ease. The HCX 1590 swing away is available in gas, electric, or PTO (side or front) drives.



FEATURES

The HCX Belt Conveyors series features; weather guards to protect the belt from outside conditions year-round, 2-ply chevron belt with a nylon slider back that works with a pinch S-Drive to maintain belt tension providing maximum capacity, and a plastic hood and collapsible canvas hopper to provide excellent cushioning for fragile materials.

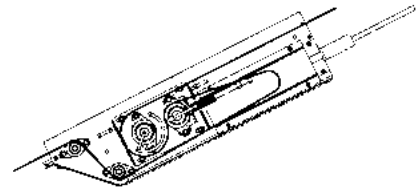

HCX Pitstop

HCX 1800 25' Length | up to 11,000 BPH

HCX 2400 27' Length | up to 18,000 BPH

The HCX Pitstop is a drive over hopper that allows trucks to unload without having to move the hopper once it has been positioned. The HCX Pitstop is available in electric or hydraulic drives.



HCX² 1515 Transfer Conveyor

The HCX² 1515 low profile transfer conveyor is a great addition to your operation, and works with your existing conveyors for loading and unloading of trucks and bins with capacity up to 6,000 BPH. The HCX² 1515 LP is available in electric or hydraulic drives.





HUTCHINSON is an AGI Brand.

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, India and Italy and distributes its products globally.

AGI HUTCHINSON

198 Commerce Drive, Winnipeg, Manitoba, Canada R3P 0Z6
1.855.432.1990 | aggrowth.com/hutchinson

AGGROWTH.COM [aggrowthintl](#) [▶](#) [▶](#) [▶](#) [▶](#) [▶](#) [▶](#)