

# UTX

U-TROUGH AUGER





## Capacities like never before

Feel the power of up to 9,000 BPH

### FEATURES

- **Wear Edge Technology™** extends the life of the flighting
- Durable **Powder Coat Paint** protects the auger finish and repels rust
- **Removeable Tow Bar** easily connects and detaches from the hitch
- **Solid Tube Guard** completely encloses the driveline
- **Square One-Bolt Flight Connections** provide improved performance through positive torque transfer for smooth operation
- **Hydraulic Winch** helps raise and lower the auger with ease and precision
- **Triple Banded Belts** maintain speed by providing better tension with less slippage
- Sealed, grease-lubricated **Top Drive** comes with forged steel sprockets and heavy-duty chain, both protected by durable cover and designed to match the auger capacity
- **Top Drive Chain Tensioner** provides better adjustment capabilities and consistent chain drive tension
- **Driveshaft and Bearings** are constructed of durable oil impregnated hardwood for long, quiet operation and can be easily replaced without disassembling the driveshaft
- **Hose Routing** provides a cleaner, sleeker look, while protecting the hoses from the elements



**Reversing gearbox**

Comes with shifting linkage and lockout, allowing the operator to safely reverse the auger at all angles.



**Collapsing spring loaded hopper extension**

Quickly and easily fit under some of your lowest and hardest to reach bins.



**Heavy-duty self-propelled mover kit with joystick hydraulic steering**

The heavy-duty, self-propelled mover makes setting up at bins and moving around the yard fast and easy, so you can get the job done in less time.




**Gas motor**

Choose either a Vanguard or Kohler gas motor, with a large 44 L gas tank that helps you work as long as you need to.



**Work lights**

LED working lights provide enhanced lighting conditions when the sun has gone down.

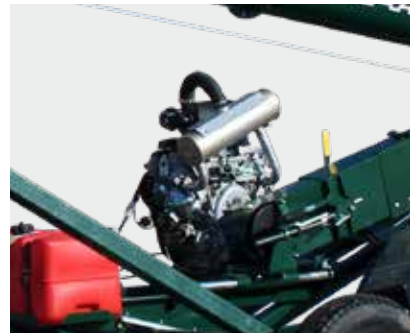

**Triple-groove electric clutch**


Start and stop the auger without shutting down the gas engine drives.

**AUGER SPECIFICATIONS**

TROUGH GAUGE	12 GA
TROUGH CONNECTORS	¼" Flange
MAIN FLIGHTING	10" OD x 7 GA stretched + welded
INTAKE FLIGHTING	10" OD x 7 GA welded with Wear Edge Technology™
FLIGHTING SHAFT	2" OD x 0.120" Wall tubing
DRIVESHAFT	1 ½" OD x 10 GA tubing
DRIVESHAFT BEARINGS	1 ½" Oil impregnated hardwood bearings
TRACK	High yield 11 GA roll formed
TRACK SHOE	2 ¾" Steel roller
UNDERCARRIAGE	3" Square tubing
AXLES	2 ½" Square tubing
HUB & WHEELS	4 Bolt agricultural type hubs, 15" wheel
LIFT CABLE	¼" Aircraft type galvanized steel cable
TIRES	15 Agricultural tires
TOP DRIVE	#80 Roller chain & hardened steel sprockets
TOP DRIVE BEARINGS	1 ¼" Pillow block
WINCH	Reduction gear with automotive brake
GEARBOX	Formed steel gears with tapered roller bearings
WHEEL TREAD	96"
GAS HP	37 - 38
CAPACITY	7,000 - 9,000 BPH

HEIGHTS MEASURED FROM BOTTOM OF AUGER SPOUT TO GROUND

A	9' 6"
B	14' 1"
C	18' 1"
D	14' 5"
E	14' 3"
F	13' 9"
G	11'



DISCHARGE CLEARANCE DIMENSIONS

MIN	9' 6"
MAX	18' 1"
HEIGHT	10' 6"

TRANSPORT DIMENSIONS

LENGTH	45' 6"
WIDTH	8'
HEIGHT	10' 6"

WEIGHT (LBS)

HITCH WEIGHT (W/ENGINE)	472
TOTAL WEIGHT (W/ENGINE)	3,058

BELT SIZE	3B270
-----------	-------



**GRAINMAXX is an AGI Brand.**

AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, South Africa, India and Italy and distributes its products globally.

# **AGI** **GRAINMAXX**

Box 1750, Swift Current, Saskatchewan, Canada S9H 4J8

P 1.877.667.7421 | [aggrowth.com/grainmaxx](http://aggrowth.com/grainmaxx)

AGGROWTH.COM    [aggrowthintl](#)       